

MARSTEK

Power Anywhere & Anytime

MARSTEK JUPITER C+

All-in-One Balcony ESS

Plug & Play Design
4 MPPT for 2.4 kW Solar Power
800 W On-Grid Power

2.56 kWh per Unit, Expandable to 10.24 kWh
>6000 Cycles LFP Cells | 15 Years Lifespan | 10 Years Warranty

HD Touch Screen
IP65 Waterproof & Dustproof

100% Self-Consumption via Smart Meter
Bluetooth / Wi-Fi / RS-485 / Modbus Protocol
Supports Integration with External EMS



Marstek Energy Co., Limited

Add: BLDG#A, Changfang Industrial Park, No.2 Guihua 5th Road, Pingshan District, Shenzhen, Guangdong, China


Tel: 86-755-28398778

Email: market@marstekenergy.com


Web: www.marstekenergy.com



SPECIFICATIONS

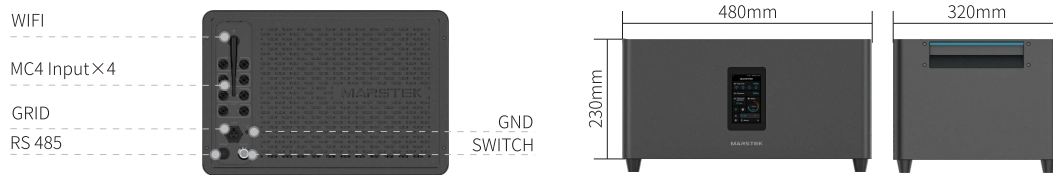

Model	MARSTEK JUPITER C+
Energy Storage Unit (Stack)	
Capacity	2.56kWh
Life Cycle	>6000(25°C)
Battery Type	LiFePO ₄
Current	50Ah
Number of Energy Storage Unit	3PCS (max)
Total Capacity of The Product	2.56~10.24kWh
PV Input	
Maximum Input Power	2400W
Operating Voltage Range	16~60V
Maximum Input Short Circuit Current(Single Channel)	20A
MPPT Track Number	4
MPPT Efficiency	99.80%
AC Output	
Rated Output Power	800VA
Working Phase	L/N/PE
Rated Grid Voltage	230V
Rated Grid Frequency	50Hz
Rated Grid Output Current	3.48A
Power Factor	> 0.99(default), 0.8lagging...0.8leading(adjustable)
THDi	<3%
Efficiency	
Battery Side - AC Side Maximum Efficiency	>96.5%
Basic Parameters	
Ambient Temperature Range	-20 ~ + 60°C (Storage-30 ~ + 85°C)
Relative Humidity	0-95%
IP Level	IP65
Cooling Method	Natural Cooling
Maximum Altitude	2000m
Net Weight / Gross Weight	28.45kg / 31kg
General	
Grid connection	BC01
Photovoltaic connection	MC4
Display	Touchable HD Screen
Communication	Bluetooth, WIFI & RS-485(Waterproof Aviation Plug)
On-grid Connection Standard	VDE 4105/0124, NF EN50549-1, CE I0-21, PETREE, PN-EN 50549-1/-2, PEA 1165-2020
Regulatory/EMC	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-2/-3/-4, IEC/EN 61000-3-2/-3, EN 300 328, EN 301 489 -1/-17, EN 50665, EN 62920, CB 62619, EN 50549-1

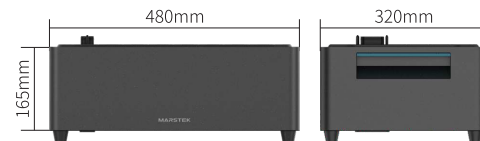

Model	MST-E2.5ST
Battery Parameter	
Capacity	2.56kWh
Life Cycle	>6000(25°C)
Battery Type	LiFePO ₄
Current	50Ah
Basic Parameters	
Ambient Temperature Range	-20 ~ + 60°C (Storage-30 ~ + 85°C)
Relative Humidity	≤95%
IP Level	IP65
Cooling Method	Natural Cooling
Maximum Altitude	2000m
Net Weight / Gross Weight	22.5kg / 24kg